

SIVI AYAR DÜĞMESİ
Fluid Adjustment Button



ALÜMİNYUM GÖVDE
Aluminium Body

TETİK HAVA GİRİŞİ
Control Air Input

HAVA ŞAPKASI
Air Cap

PÜSKÜRTME HAVA GİRİŞİ
Spray Air Input

SIVI GİRİŞİ
Fluid Input

DÜŞÜK BASINÇ HAVALI Otomatik Püskürtme Tabancası

LEOPAR

dermix®

Low Pressure Airspray Automatic Spray Gun

TEKNİK ÖZELLİKLER


Technical Properties

ÇALIŞMA BASINCI	Working Pressure	: 3 Bar
SIVI BASINCI	Fluid Pressure	: 0.2 - 6 Bar
HAVA BASINCI	Air Pressure	: 1 - 8 Bar
TETİK HAVA GİRİŞİ	Valve Air Input	: 1/8"
DİREK HAVA GİRİŞİ	Direct Air Input	: 1/4"
SIVI GİRİŞİ	Liquid Input	: 1/4"
ÖLÇÜLER (E x B x Y)	Dimensions (W x L x H)	: 45 x 65 x 135 mm
AĞIRLIK	Weight	: 502 gr
İĞNE SEÇENEKLERİ	Needle Options	: 1.0 - 1.5 mm

KULLANIM ALANLARI

Applications

- KEK TAVA YAĞLAMA Cake Pan Lubrication
- KALIP YAĞLAMA SİSTEMLERİ Mold Lubrication Systems

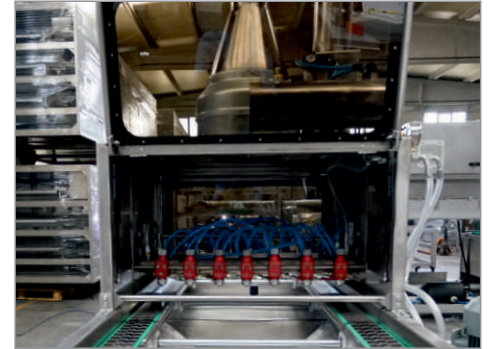

PÜSKÜRTME BAŞLIKLARI

Technical Properties

YENİ DAR AÇI BAŞLIK
Narrow Wide Angle Cap



YENİ GENİŞ AÇI BAŞLIK
New Wide Angle Cap



YENİ BURGULU MEME
New Twisted Nozzle

